




# Current-compensated choke series for lighting applications

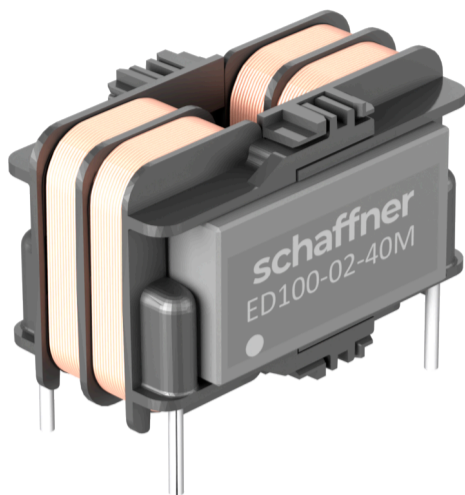

### Performance indicators

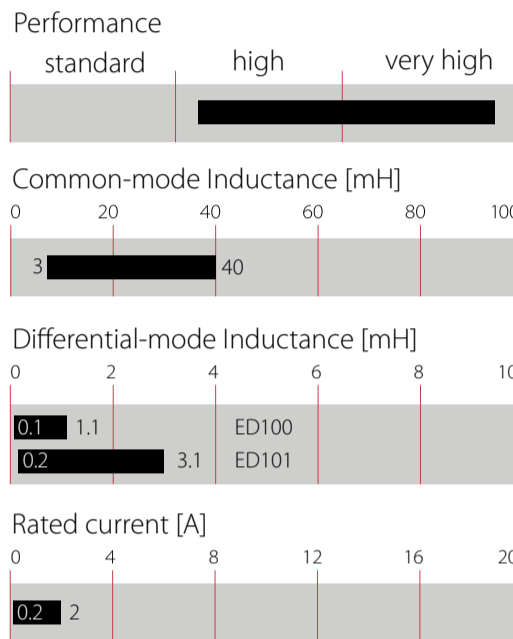

### Approvals & Compliances

#### RoHS

Lighting LED drivers need to be high in efficiency, low in cost and compliant to EMC regulations. The ED100 / ED101 series increases the efficiency of a LED driver circuit by reducing the need for X-capacitors. Thus, the power factor rises, and less unwanted reactive power is generated. The inductor is a combination of a strong common-mode inductance with a significant differential-mode inductance. It offers two filtering elements in one component. This helps the circuit designer to reduce the number of elements on the PCB, to reduce space requirement as well as lowering costs. Combined with the high MTBF value of the ED100 / ED101 series, a circuit design with reduced number of components profits for its overall reliability and lifetime.

#### Features and Benefits

- Increases power factor
- Combination of common- and differential-mode inductances
- Rated currents up to 2 A
- Compact and light-weight
- Small PCB footprint










### Technical Specifications

<b>Rated currents</b>	0.2 to 2 A @ 65°C
<b>Operating frequency</b>	DC to 60 Hz
<b>Creepage and clearance distances</b>	Creepage > 3 mm / Clearance > 2.5 mm between windings
<b>Rated inductance</b>	3 to 40 mH common-mode
<b>Operating voltage</b>	300 VAC, 50/60 Hz
<b>Overtoltage category</b>	II acc. IEC 60664-1
<b>Pollution degree</b>	PD2 acc. IEC 60664-1
<b>Stray inductance</b>	0.1 - 3.1 mH
<b>Inductance reduction (DC bias with IN)</b>	Less than 10% at rated current
<b>Temperature range (operation and storage)</b>	-40°C to 125°C
<b>Climatic category</b>	40/125/56 acc. IEC 60068-1
<b>Cooling</b>	AN - natural convection
<b>Altitude</b>	Derating above 2,000 m
<b>Protection category</b>	IP 00
<b>Flammability corresponding to</b>	UL 94 V-0
<b>Vibration and shock</b>	3M4 acc. IEC 60721-3-3
<b>Design corresponding to</b>	IEC 60938-1/-2
<b>MTBF (Mil-HB-217F)</b>	>13,000,000 h @ 65°C/250 V










### Typical Applications

- Mains operated LED drivers
- Electronic ballasts
- Input filters for switch mode power supplies

## Choke Selection Table - ED100 - High Differential-Mode Inductance


ED100 choke	Buy	Rated current I (@65°C) [A]	Common- Mode Inductance L (CM) (@10kHz) [mH]	Differential- Mode Inductance L (DM) (@10kHz) [mH]	DC resistance R (@25°C) [Ω]	Weight [g]
ED100-0.2-40M		0.2	40	1.1	10.0	10
ED100-0.3-27M		0.3	27	0.8	5.5	10
ED100-0.4-20M		0.4	20	0.6	3.7	10
ED100-0.5-15M		0.5	15	0.4	2.0	10
ED100-0.75-12M		0.75	12	0.3	1.2	11
ED100-1-9M0		1	9	0.3	0.6	12
ED100-1.25-7M0		1.25	7	0.2	0.4	13
ED100-1.5-5M0		1.5	5	0.1	0.3	13
ED100-2-3M0		2	3	0.1	0.2	13

## Choke Selection Table - ED101 - Very High Differential-Mode Inductance

ED101 choke	Buy	Rated current I (@65°C) [A]	Common- Mode Inductance L (CM) (@10kHz) [mH]	Differential- Mode Inductance L (DM) (@10kHz) [mH]	DC resistance R (@25°C) [Ω]	Weight [g]
ED101-0.2-40M		0.2	40	3.1	10.0	11
ED101-0.3-27M		0.3	27	2.1	5.5	11
ED101-0.4-20M		0.4	20	1.5	3.7	11
ED101-0.5-15M		0.5	15	1.2	2.0	12
ED101-0.75-12M		0.75	12	0.9	1.2	12
ED101-1-9M0		1	9	0.7	0.6	13
ED101-1.25-7M0		1.25	7	0.5	0.4	14
ED101-1.5-5M0		1.5	5	0.4	0.3	14
ED101-2-3M0		2	3	0.2	0.2	14

Test conditions: Measuring frequency: 10 kHz; 50 mV; Inductance tolerance: +50%, -30%; Resistance tolerance: ±15% @ 25°C; Electrical characteristics @ 25°C: ±2°C; Differential-mode inductance measurement between pin 1 and 2 (pin 3 and 4 shorted)  
For mechanical tolerances refer to mechanical data section.

## Current Derating

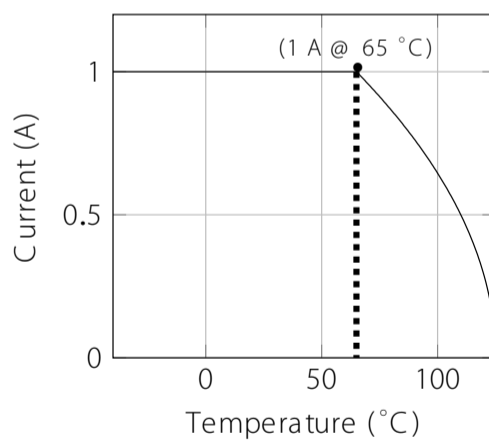

Derating curve normalized to 1 A

## Distribution Inventory


Up-to-date inventory levels for global distributors is available at

<https://products.schaffner.com/stock>




### Typical Choke Attenuation - ED100 - High Differential-Mode Inductance


Per CISPR 17; 50 Ω/50 Ω asym

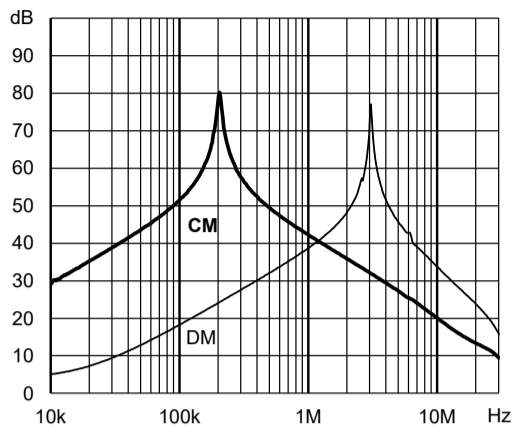


ED100-0.2-40M

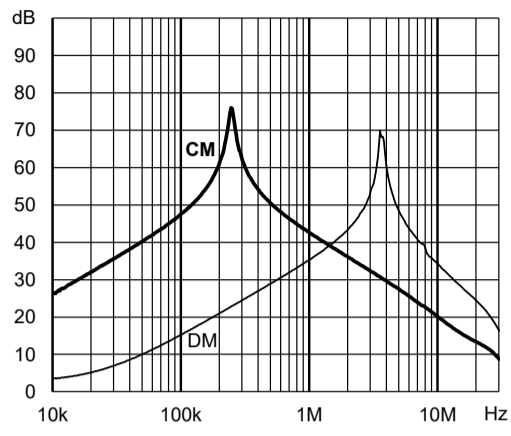


ED100-0.3-27M

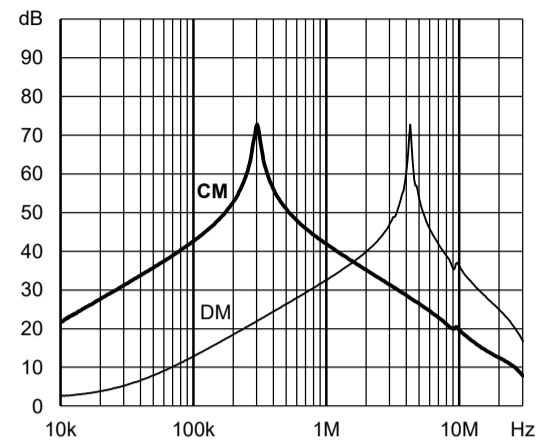


ED100-0.4-20M

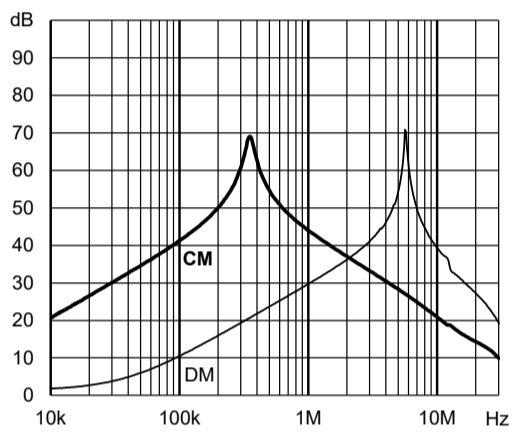


ED100-0.5-15M

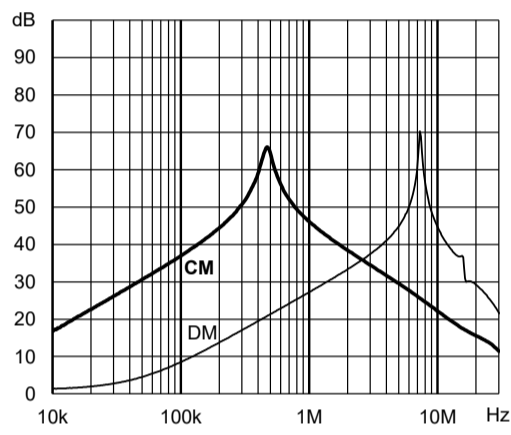


ED100-0.75-12M

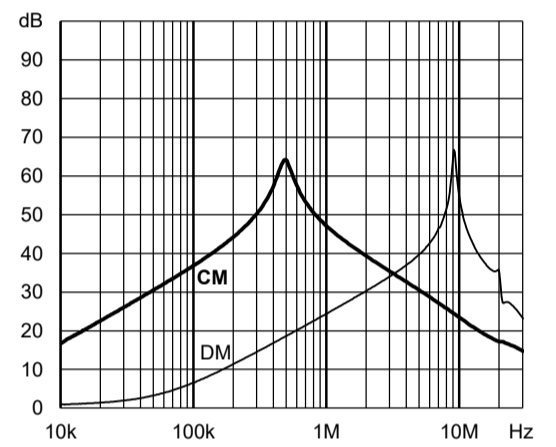


ED100-1-9M0

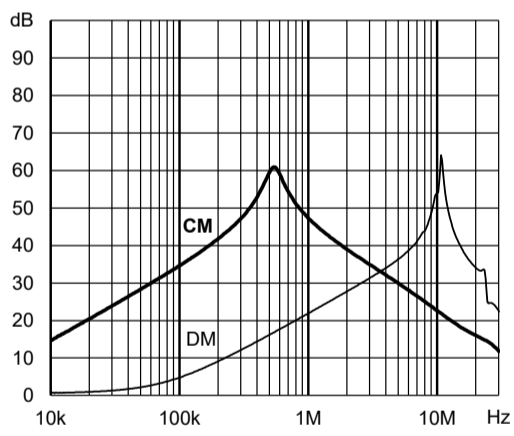

ED100-1.25-7M0

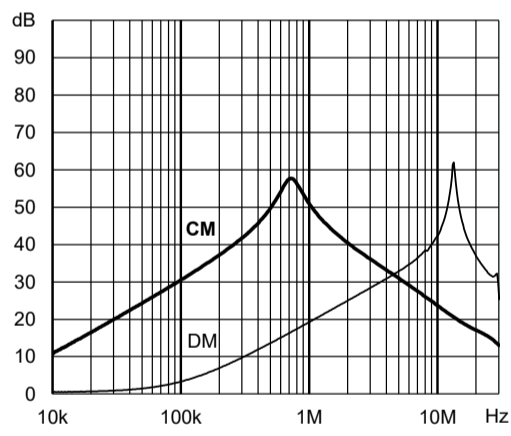


ED100-1.5-5M0

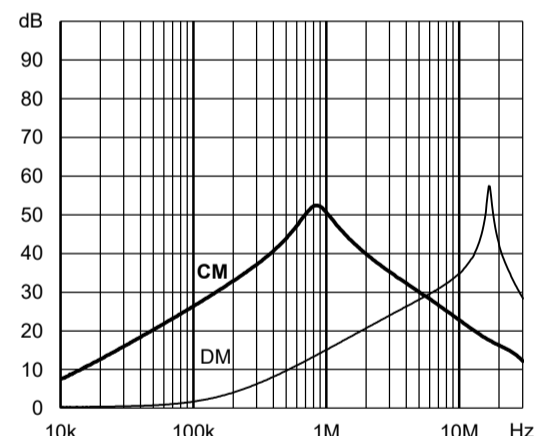


ED100-2-3M0

### Typical Choke Attenuation - ED101 - Very High Differential-Mode Inductance


Per CISPR 17; 50 Ω/50 Ω asym

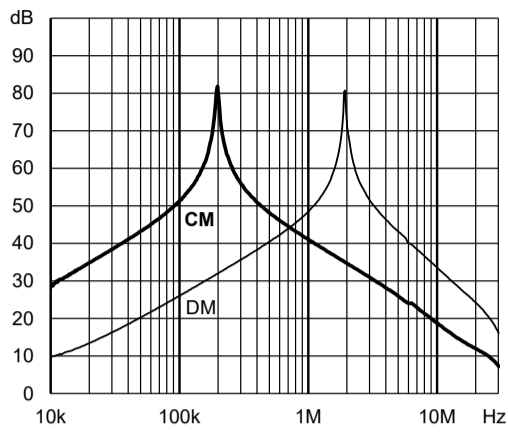


ED101-0.2-40M

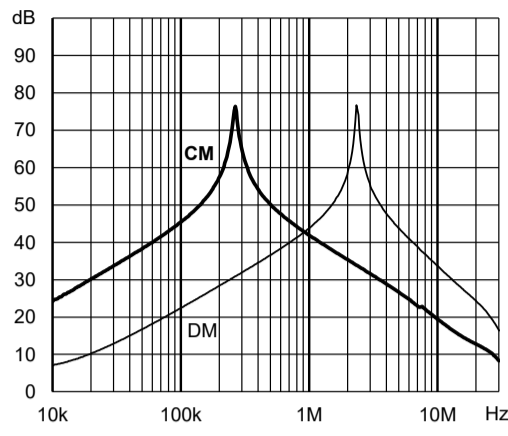


ED101-0.3-27M

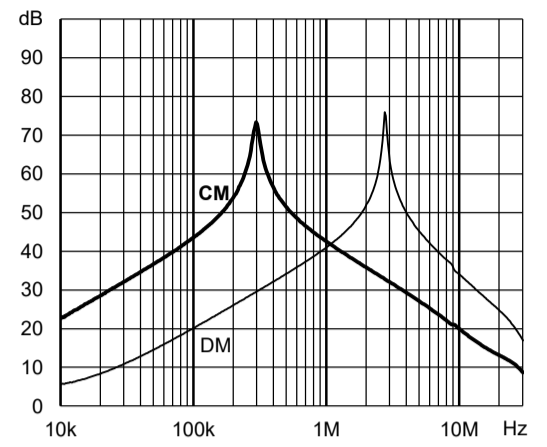


ED101-0.4-20M

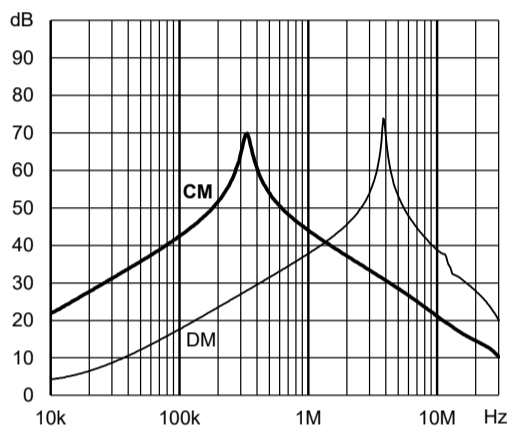


ED101-0.5-15M

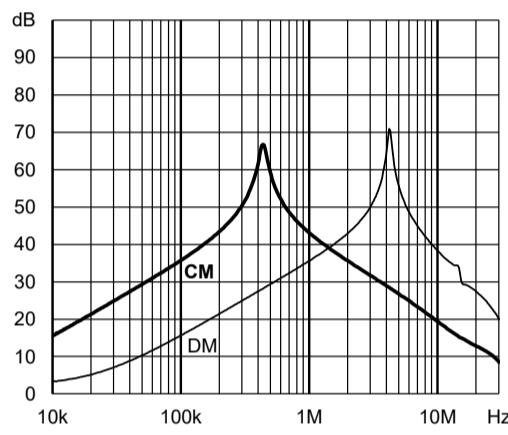


ED101-0.75-12M

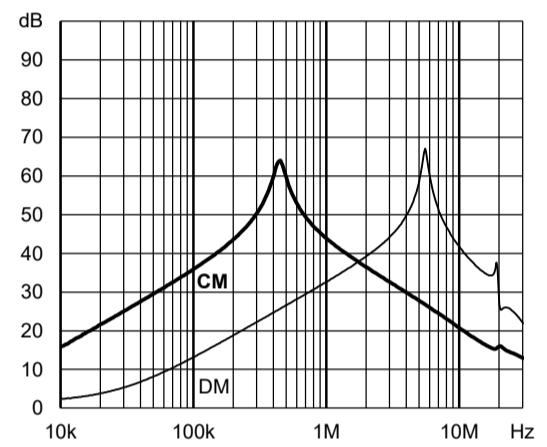


ED101-1-9M0

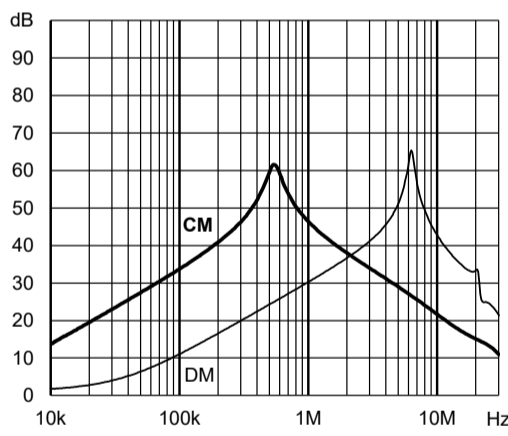

ED101-1.25-7M0

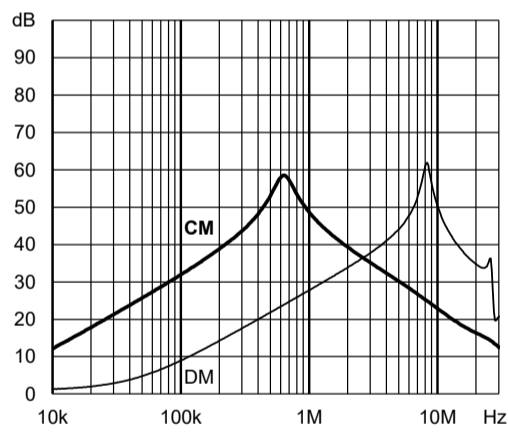



ED101-1.5-5M0

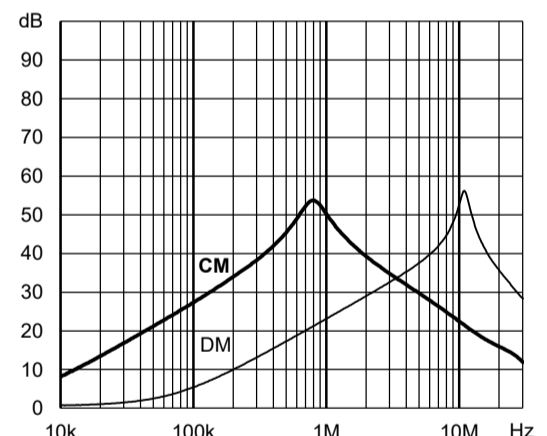





ED101-2-3M0

### Differential Mode Saturation

The ED series offers a significant differential-mode inductance with high saturation characteristics.

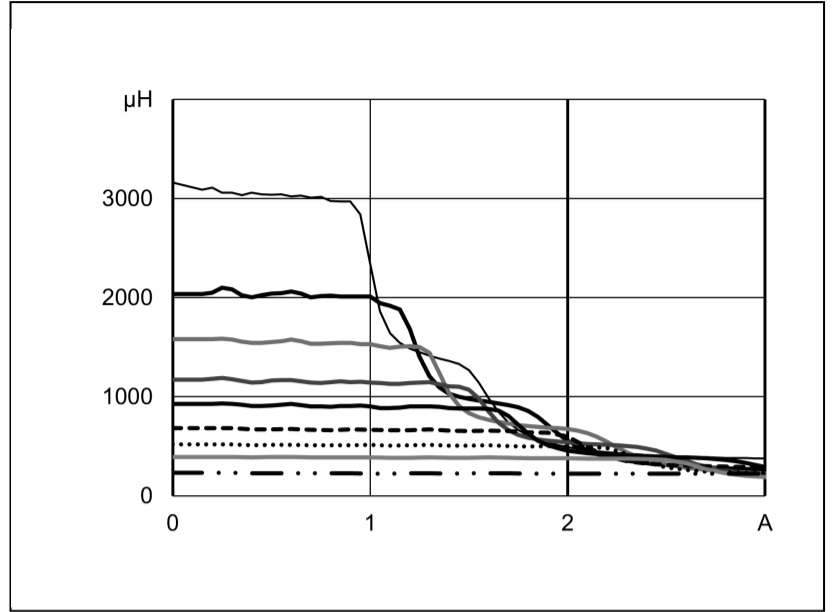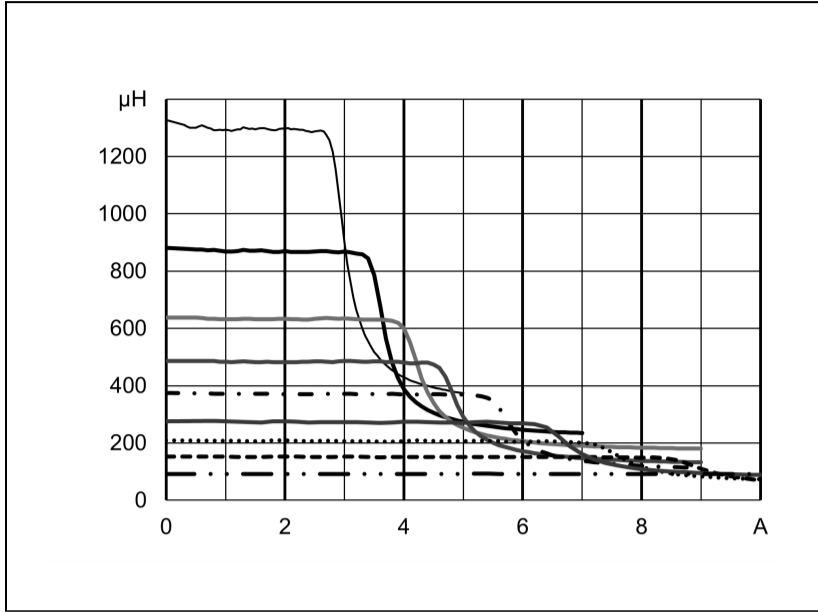

### Mechanical Data - ED100 / ED101

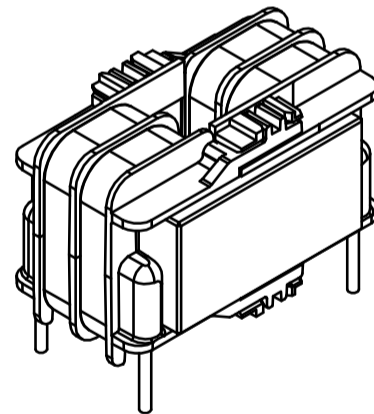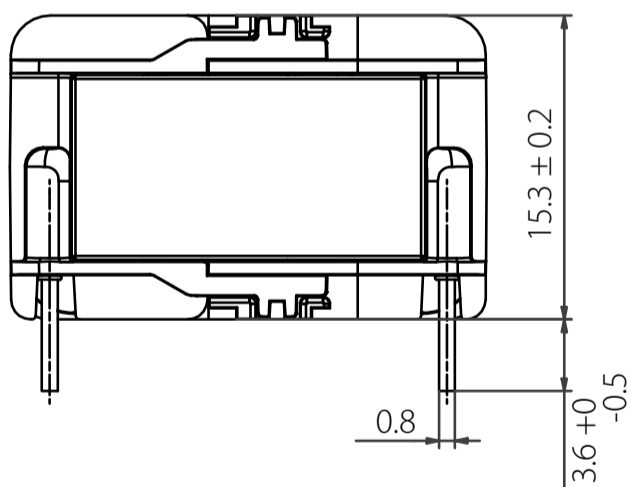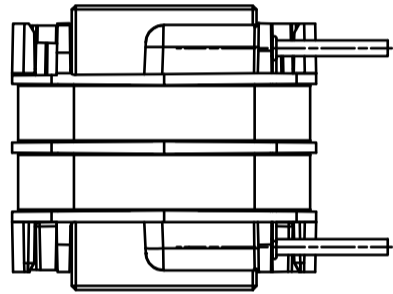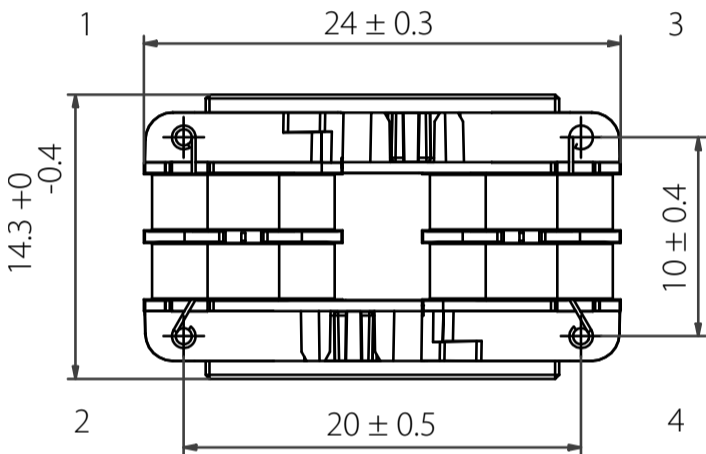

For dimensions [mm] without tolerances: ISO2768-m/EN22768-m applies

Pin material: Steel (base), Cu (under plating), Sn (final plating 6µm)

Pin 1 marked with "dot" on label

## Headquarters, Global Innovation and Development

### Switzerland

#### Schaffner Group

Industrie Nord  
Nordstrasse 5  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

## Sales and Application Centers

### Finland

#### Schaffner Oy

Lohjanharjuntie 1109  
08500  
Lohja  
+ 358 50 468 72 84  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

### France

#### Schaffner EMC S.A.S.

16-20 Rue Louis Rameau  
95875  
Bezons  
+33 1 34 34 30 60  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

### Germany

#### Schaffner Deutschland GmbH

Ohiostr. 8  
76149  
Karlsruhe  
+49 721 56910  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

### Italy

#### Schaffner EMC S.r.l.

Via Ticino, 30  
20900  
Monza (MB)  
+39 335 120 44 32  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

### United States

#### Schaffner EMC Inc.

52 Mayfield Avenue  
Edison, New Jersey  
+1 732 225 9533  
[usasales@schaffner.com](mailto:usasales@schaffner.com)

### Japan

#### Schaffner EMC K.K.

ISM Sangenjaya 7F  
1-32-12 Kamiyama Setagaya-ku  
154-0011  
Tokyo  
+81 3 5712 3650  
[japansales@schaffner.com](mailto:japansales@schaffner.com)

### Sweden

#### Schaffner EMC AB

Östermalmströgrg 1  
114 42  
Stockholm  
+46 8 5050 2425  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)

### Switzerland

#### Schaffner EMV AG

Industrie Nord  
Nordstrasse 5  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

### India

#### Schaffner India Pvt. Ltd

Regus World Trade Centre  
WTC 22nd Floor Unit No 2238 Brigade  
Gateway Campus 26/1 Dr. Rajkumar Road  
Malleshwaram (W)  
560055  
Bangalore  
+91 8067935355  
[indiasales@schaffner.com](mailto:indiasales@schaffner.com)

### United Kingdom

#### Schaffner Ltd.

Suite 1 Oakmede Place  
Terrace Road  
RG42 4JF  
Binfield  
+44 118 9770070  
[schaffner.uksales@te.com](mailto:schaffner.uksales@te.com)

### Singapore

#### Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1 #05-09 Kampong Ubi  
Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

To find your local partner within Schaffner's global network [schaffner.com](http://schaffner.com)

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.