



# 3-phase Line Reactor to reduce mains disturbances



- 4% 3-phase line reactor for 400 V network
- Reducing harmonics on the mains side
- Reducing commutation notches
- Limiting inrush current
- Reliable and economical solution for mitigating mains disturbances

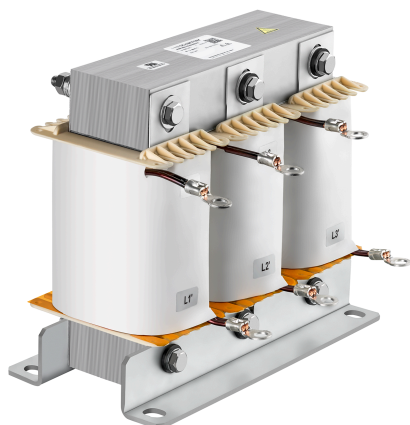

### Performance indicators

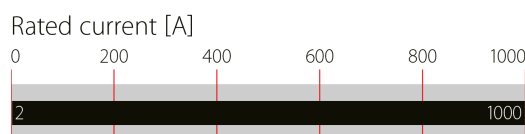

## Technical Specifications

<b>Nominal operating voltage</b>	3x 380 to 480 VAC
<b>Rated operating voltage</b>	3x 340 to 530 VAC
<b>Impedance</b>	4% @ 400 V, 50 Hz and rated rms current
<b>Insulation class</b>	UL electrical insulation system SCH-200(N)
<b>Protection category</b>	IP 00
<b>Cooling</b>	Natural cooling AN
<b>Overload capability</b>	1.6x rated current for 1 minute, once per hour
<b>Ambient temperature range</b>	-40°C to +45°C fully operational +45°C to +100°C derated operation* Note: derating according NEC 310-15(C)
<b>Transportation and storage temperature</b>	-40°C to +100°C transport and storage
<b>Flammability corresponding to</b>	UL 94V-0
<b>Design corresponding to</b>	UL 61800-5-1, EN 61558-2-20, EN 60076-6
<b>Lifetime (calculated)</b>	20 years
<b>Earthing System</b>	TN, TT, IT
<b>Climatic category</b>	40/100/21 (IEC 60068-1)
<b>Pollution degree</b>	PD3
<b>Overvoltage category</b>	OV III (IEC 60664-1 / UL 61800-5-1)

\* Derated =  $I_{derated} = I_{nominal} \cdot \sqrt{\frac{(T_{max} - T_{amb})}{(T_{max} - T_{nominal})}}$  =  $I_{nom} \cdot \sqrt{\frac{(100^{\circ}C - T_{amb})}{55^{\circ}C}}$

### Approvals & Compliances



(UL recognized up to 640 A)


### Features and Benefits

- Ensure reliability, performance and a long service life of electrical consumers
- Reduction of mains harmonics and commutation notches
- Help to meet international power quality standards
- Protection of motor drive electronics and dc link capacitors against mains transients
- Reduction of inrush and peak currents
- Improvement of conducted LF immunity
- Prevention from nuisance tripping caused by power line voltage spikes
- Improvement of true power factor

### Typical Applications

- Motor drives and various adjustable speed drive systems, such as:
  - HVAC
  - Robots
  - Machinery
  - Process automation equipment

### Typical electrical schematic

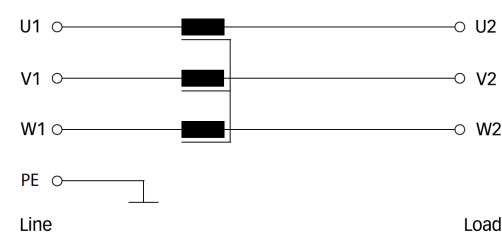

## Reactor Selection Table

Reactor	Rated current	Rated Power *	Rated Power**		Full load current***	Inductance value	Typical power losses	Terminal	Weight	
	@ 45°C [A]	@ 400V [kW]	[kW]	@ 480V [HP]					[kg]	[lbs]
RWK 3044-2-88-E0XXX	1.76	1.1	1.1/1.5	1.5	3	16.7	23	88	0.49	2.1
RWK 3044-3.5-88-E0XXX	3.53	2.2	2.2/3	3	5.5	8.3	32	88	0.89	2
RWK 3044-6.5-88-E0XXX	6.42	4	4/5.5	5	10	4.6	47	88	1.2	2.6
RWK 3044-9-88-E0XXX	8.82	5.5	5.5/7.5	7.5	13	3.3	61	88	1.7	3.7
RWK 3044-12-88-E0XXX	12.0	7.5	7.5/11	10	16	2.44	69	88	2.4	5.3
RWK 3044-18-89-E0XXX	17.6	11	11/15	15	24	1.67	103	89	3.4	7.5
RWK 3044-24-89-E0XXX	24.1	15	19	25	32	1.22	106	89	4.9	10.8
RWK 3044-30-92-E0XXX	29.7	18.5	22	30	38	0.99	124	92	5.1	11.2
RWK 3044-35-92-E0XXX	35.3	22	30	40	45	0.83	151	92	5.4	11.9
RWK 3044-48-92-E0XXX	48.1	30	37	50	60	0.61	172	92	8.8	19.4
RWK 3044-59-92-E0XXX	59.3	37	45	60	75	0.50	206	92	10.2	22.5
RWK 3044-72-99-E0XXX	72.2	45	55	75	90	0.41	294	99	10.3	22.7
RWK 3044-88-99-E0XXX	88.2	55	55/75	100	110	0.33	257	99	11.4	25.1
RWK 3044-120-99-E0XXX	120	75	90	125	150	0.24	324	99	13.8	30.4
RWK 3044-140-99-E0XXX	144	90	110	150	180	0.20	399	99	15.7	34.6
RWK 3044-180-99-E0XXX	176	110	132	175	210	0.17	456	99	20.0	44.1
RWK 3044-210-99-E0XXX	212	132	160	200	260	0.14	553	99	24.5	54
RWK 3044-260-99-E0XXX	257	160	200	250	320	0.11	593	99	27.5	60.6
RWK 3044-320-99-E0XXX	321	200	250	300-325	400	0.092	747	99	34.5	76.1
RWK 3044-400-99-E0XXX	401	250	315	400-425	530	0.073	1055	99	45.5	100.3
RWK 3044-510-99-E0XXX	505	315	355	450-475	555	0.058	1069	99	49.5	109.1
RWK 3044-570-99-E0XXX	569	355	400	500-525	750	0.052	1181	99	67.5	148.8
RWK 3044-640-99-E0XXX	642	400	450	600	900	0.046	1116	99	68.5	151
RWK 3044-800-99-E0XXX	802	500	550/630	700-800	935	0.037	1280	99	103	227.1
RWK 3044-1000-99-E0XXX	1010	630	750	900-1000	1120	0.029	1167	99	110	242.5

\* Calculated at rated current, 400VAC and cos phi=0.90

\*\* Calculated at rated current, 480VAC and cos phi=0.89

\*\*\* For reference in North America market


## Terminals

Type	-88	-89	-92	-99
Ring cable shoe	-	-	M6	M8/M10/M12
Fork cable shoe	M3.5 width max. 6.4mm	M4 width max. 8.0mm	-	-
Flex wire AWG	22-16	16-14	-	-
Rec. torque	0.78 Nm	1.76 Nm	-	-

## Earth Screw


Type	Size	[Nm]	Torque [lbs-in]
2A	M2.5	0.3	2.7
3.5-12A	M3	0.6	5.3
18-35A	M4	1.7	15
48-120A	M6	4	35.4
140-1000A	M8	9	79.7

### RWK 3044 Impedance Vs. Voltage




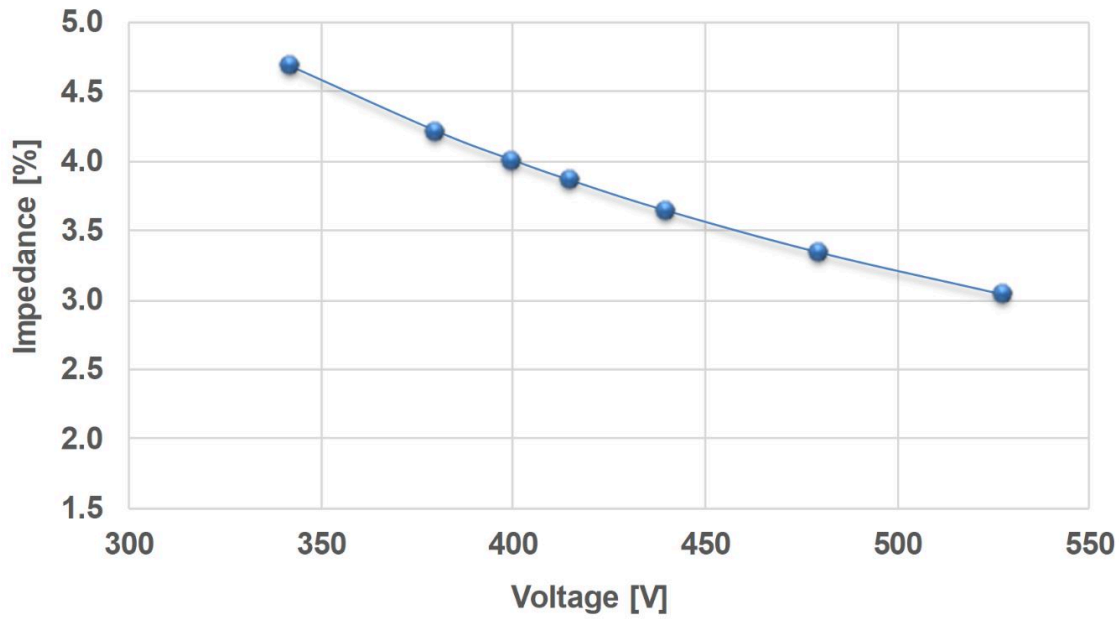


Product selector

#### RWK 30n m-xxx-yy-E0 XXX

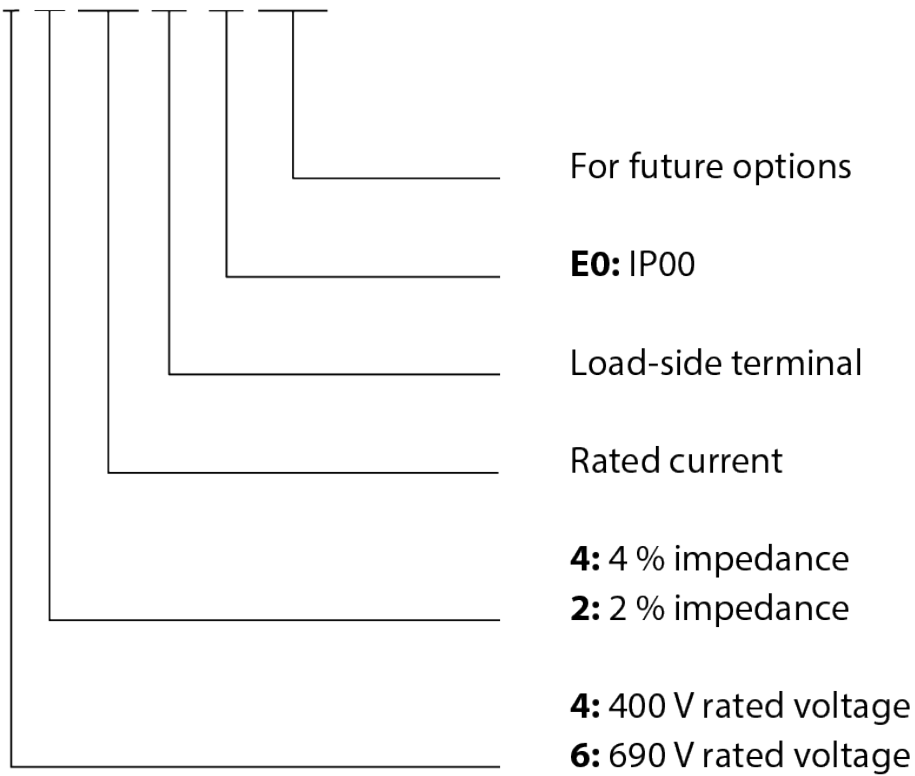

**Mechanical Data**

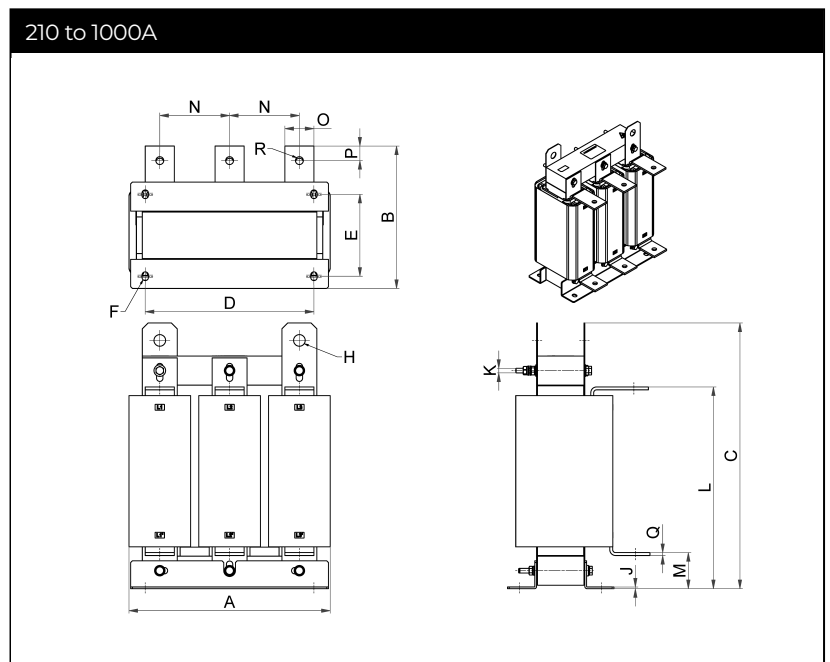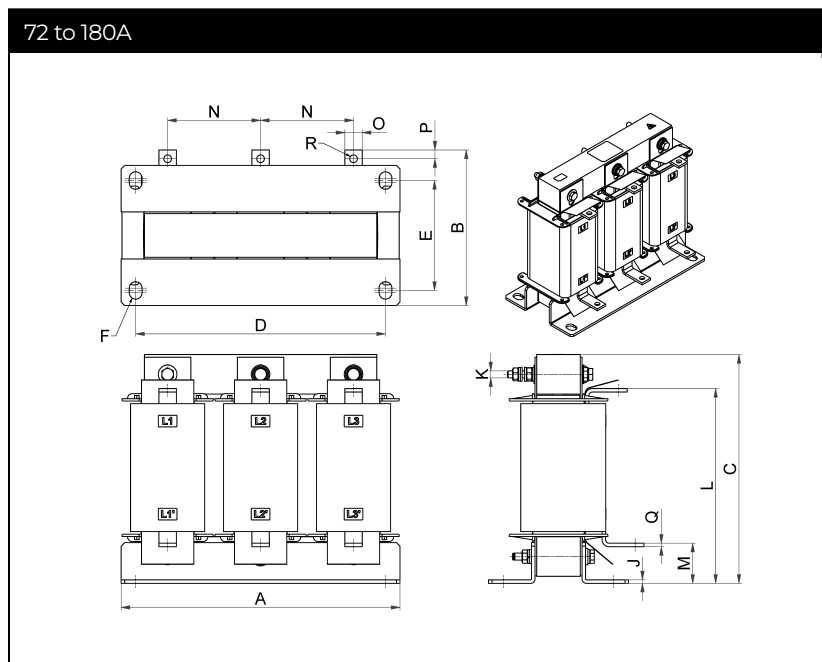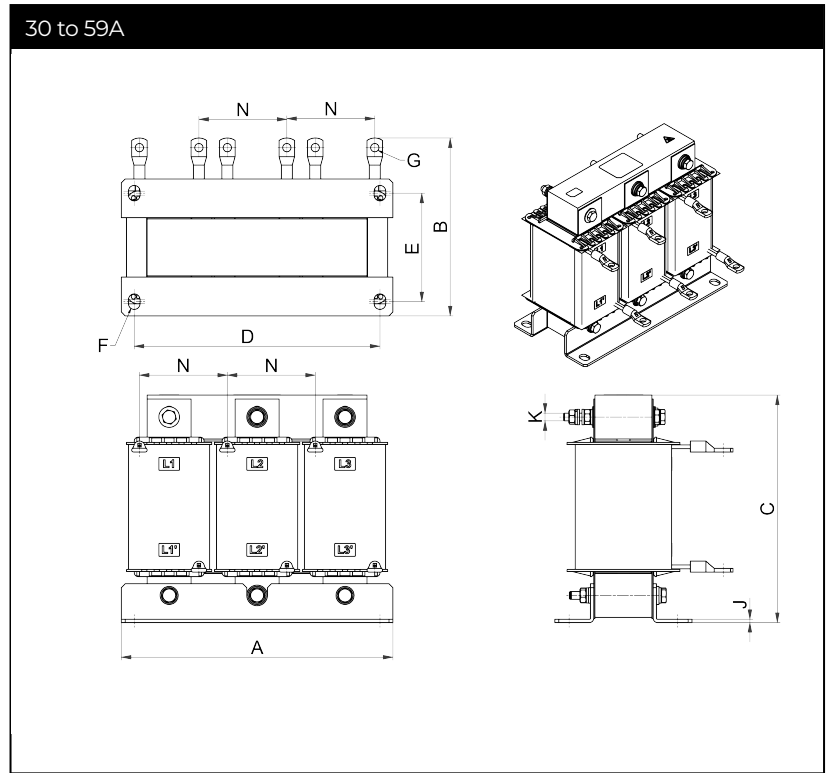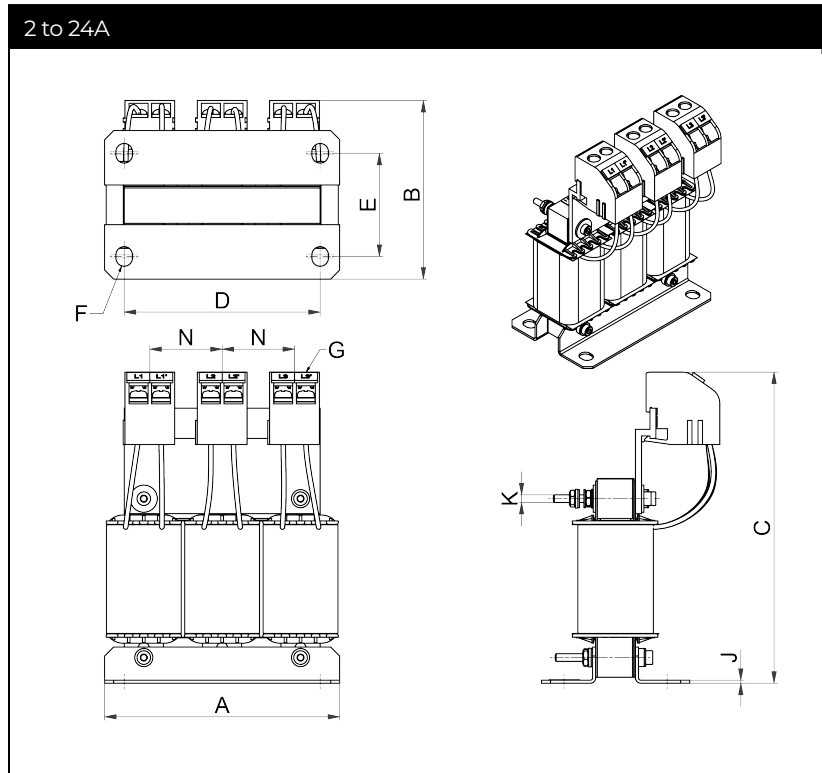

## Dimensions In Mm\*

RWK 3044	A	B±5	C±3	D	E	F	G	H	J	K	L±5	M±5	N±5	O	P	Q	R
2	78	59	103.1	65	34.2	6.5x5.5	-88		1	M2.5			24±1				
3.5	96	62.5	117.9	77	37.5	6.5x5.5	-88		1.5	M3			31±1				
6.5	125	69	136.1	110	44.8	8x5.5	-88		2	M3			41.5±1				
9	125	69	136.8	110	44.8	8x5.5	-88		2	M3			41.5±1				
12	125	78.5	136.4	110	54.5	8x5.5	-88		2	M3			41.5±1				
18	155	79	159.7	130	56.1	12x9	-89		2.5	M4			50±1				
24	155	94	159	130	71	12x9	-89		2.5	M4			50±1				
30	155	128	132	130	71	12x9	ø6.4		2.5	M4			50±4				
35	155	128	132.7	130	71	12x9	ø6.4		2.5	M4			50±4				
48	190	140	156.6	170	77.5	12x9	ø6.4		2.5	M6			60±4				
59	210	143	176	190	84	12x9	ø6.4		2.5	M6			68±4				
72	230	122.7	191	210	77.5	12x9			2.5	M6	163	30	76±4	15	7.5	3	ø6.6
88	240	133.9	196.7	215	94.5	15x11			3	M6	167.5	34.5	80±4	15	7.5	3	ø6.6
120	240	152.3	196.7	215	104.5	15x11			3	M6	168.5	34.5	80±4	20	10	4	ø9
140	265	148.9	217.5	240	99.7	15x11			3	M8	183	39	88±4	20	10	4	ø9
180	291	171.1	235	260	117.5	15x11			3	M8	198.5	39.5	96±4	25	12.5	4	ø11
210	290	189.4	234.2	260	131	15x11		n/a	3	M8	201.7	42.7	96	25	12.5	4	ø11
260	290	194.6	287.2	260	136	15x11		ø20	3	M8	206.2	42.2	100	25	12.5	4	ø11
320	340	198.9	333.5	290	121	15x11		ø20	3	M8	237.5	52.5	112	30	15	5	ø11
400	360	190.4	422.2	310	121	15x11		ø20	3	M8	297	62	125	30	15	5	ø11
510	360	203.7	422.6	310	121	15x11		ø20	3	M8	297	62	125	40	20	5	ø13.5
570	346±5	244	457	290	141	15x11		ø20	3	M8	347	62	120	50	25	5	ø13.5
640	347±5	244.8	457	290	141	15x11		ø20	3	M8	347	62	120	50	25	5	ø13.5
800	365±5	296.3	474	310	185	15x11		ø20	3	M8	373.5	55.5	130	50	25	8	ø13.5
1000	376±5	309	474	310	185	15x11		ø20	3	M8	379	61	130	50	25	8	ø13.5

\* General tolerance: ISO 2768-v

## Dimensions In Inches\*

RWK 3044	A	B±0.2	C±0.12	D	E	F	G	H	J	K	L±0.2	M±0.2	N±0.2	O	P	Q	R
2	3.07	2.32	4.06	2.56	1.35	0.26x0.22	-3.46		0.04	M2.5			0.94±0.04				
3.5	3.78	2.46	4.64	3.03	1.48	0.26x0.22	-3.46		0.06	M3			1.22±0.04				
6.5	4.92	2.72	5.36	4.33	4.76	0.31x0.22	-3.46		0.08	M3			1.63±0.04				
9	4.92	2.72	5.39	4.33	1.76	0.31x0.22	-3.46		0.08	M3			1.63±0.04				
12	4.92	3.09	5.37	4.33	2.15	0.31x0.22	-3.46		0.08	M3			1.63±0.04				
18	6.1	3.11	6.29	5.12	2.21	0.47x0.35	-3.5		0.1	M4			1.97±0.04				
24	6.1	3.7	6.26	5.12	2.8	0.47x0.35	-3.5		0.1	M4			1.97±0.04				
30	6.1	5.04	5.2	5.12	2.8	0.47x0.35	Ø6.4		0.1	M4			1.97±0.16				
35	6.1	5.04	5.22	5.12	2.8	0.47x0.35	Ø6.4		0.1	M4			1.97±0.16				
48	7.48	5.51	6.17	6.69	3.05	0.47x0.35	Ø6.4		0.1	M6			2.36±0.16				
59	8.27	5.63	6.93	7.48	3.31	0.47x0.35	Ø6.4		0.1	M6			2.68±0.16				
72	9.06	4.83	7.52	8.27	3.05	0.47x0.35			0.1	M6	6.42	1.18	2.99±0.16	0.59	0.3	0.12	Ø6.6
88	9.45	5.27	7.74	8.46	3.72	0.59x0.43			0.12	M6	6.59	1.36	3.15±0.16	0.59	0.3	0.12	Ø6.6
120	9.45	6	7.74	8.46	4.11	0.59x0.43			0.12	M6	6.63	1.36	1.15±0.16	0.79	0.39	0.16	Ø9
140	10.43	5.86	8.56	9.45	3.93	0.59x0.43			0.12	M8	7.2	1.54	3.46±0.16	0.79	0.39	0.16	Ø9
180	11.46	6.74	9.25	10.24	4.63	0.59x0.43			0.12	M8	7.81	1.56	3.78±0.16	0.98	0.49	0.16	Ø11
210	11.42	7.46	9.22	10.24	5.16	0.59x0.43		n/a	0.12	M8	7.94	1.68	1.54	0.98	0.49	0.16	Ø11
260	11.42	7.66	11.31	10.24	5.35	0.59x0.43		Ø20	0.12	M8	8.12	1.66	1.56	0.98	0.49	0.16	Ø11
320	13.39	7.83	13.13	11.42	4.76	0.59x0.43		Ø20	0.12	M8	9.35	2.07	1.68	1.18	0.59	0.2	Ø11
400	14.17	7.5	16.62	12.2	4.76	0.59x0.43		Ø20	0.12	M8	11.69	2.44	1.66	1.18	0.59	0.2	Ø11
510	14.17	8.02	16.64	12.2	4.76	0.59x0.43		Ø20	0.12	M8	11.69	2.44	2.07	1.57	0.79	0.2	Ø13.5
570	13.62±0.2	9.61	17.99	11.42	5.55	0.59x0.43		Ø20	0.12	M8	13.66	2.44	2.44	1.97	0.98	0.2	Ø13.5
640	13.66±0.2	9.64	17.99	11.42	5.55	0.59x0.43		Ø20	0.12	M8	13.66	2.44	2.44	1.97	0.98	0.2	Ø13.5
800	14.37±0.2	11.67	18.66	12.2	7.28	0.59x0.43		Ø20	0.12	M8	14.7	2.19	2.44	1.97	0.98	0.31	Ø13.5
1000	14.8±0.2	12.17	18.66	12.2	7.28	0.59x0.43		Ø20	0.12	M8	14.92	2.4	2.44	1.97	0.98	0.31	Ø13.5

\* General tolerance: ISO 2768-v

## Headquarters, Global Innovation and Development

### Switzerland

#### Schaffner Group

Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

## Sales and Application Centers

### Switzerland

#### Schaffner EMV AG

Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

### China

#### Schaffner EMC Ltd. Shanghai

T20-3 C No 565 Chuangye Road Pudong district  
201201  
Shanghai  
+86 2138139500  
[cschina@schaffner.com](mailto:cschina@schaffner.com)

### Singapore

#### Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1 #05-09 Kampong Ubi Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

To find your local partner within Schaffner's global network [schaffner.com](http://schaffner.com)

© 2022 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.